


HEAT PUMP ASSEMBLY

Male NPT Fitting x Female Gasket Swivel

TYPICAL USES

Fan Coils | Water Coolers | Water Heaters | Water Fountains | Water Source Heat Pumps

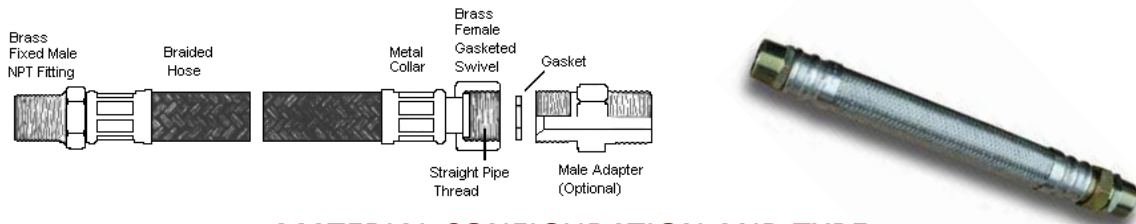

MATERIAL CONFIGURATION AND TYPE

- **Hose Core-EPDM**
- **Braid** | 300 Series Corrosion Resistant Stainless Steel
- **Braid Collars** | Aluminum *Stainless Steel is provided with all Insulated Assemblies*
- **Fixed Male End** | Brass Male Threaded NPT
- **Female Swivel Cone Seat** | NPSM Female Threaded Brass
- **Female Swivel Flat Seat** | NPSM Female Threaded Brass
- **Gasket** | Fiber
- **Adapter** | Male NPSM X Male NPT *tapered*
- **Ferrule** | Sizes 1 ¼" or less = Stainless Steel
- **Sizes** | 1½ and 2" = Aluminum

FEATURES

- ASTM E 84-01 Fire Rating Available with Fire Rated Outer Insulation
- High Temp Products Can be used up to 230 degrees F.
- Custom Lengths and Fittings Available
- Standard Sizes Always In – Stock for Immediate Delivery
- Volume and Distributor Discounts

Size	Bend Radius	Working Pressure	Burst Pressure	Temp. Min/Max
1/2"	2"	350 PSI	1400 PSI	25° / 195°F
3/4"	3-1/4"	300 PSI	1200 PSI	25° / 195°F
1"	4"	225 PSI	900 PSI	25° / 195°F
1-1/4"	5-1/4"	200 PSI	800 PSI	25° / 195°F
1-1/2"	6-1/2"	150 PSI	600 PSI	25° / 195°F
2"	8"	100 PSI	400 PSI	25° / 195°F

Hose Fittings Available | Fixed Male x Male Swivel & Fixed Male x Female Swivel
Lengths Available: 12"- 48", in 6" increments

Toll Free: 877-462-1007

Fax: 847-462-1450

24/7 Emergency Service: 847-337-9459

www.duraflexinc.com



© Copyrights 2004-2009 Duraflex, Inc.™ All rights reserved.

765 Industrial Drive

Cary, IL 60013

Em: duraflex@duraflexinc.com