


STANDARD EXHAUST BRAIDED BELLOWS

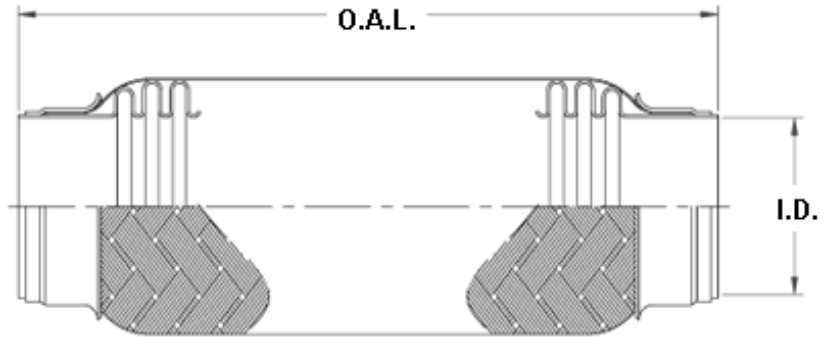

- Materials: 300 SS Bellows & Braid (Inc 625 Also Available), Aluminized Carbon Steel End Cap (Stainless Steel Also Available)
- Bellows Construction: Multi-Ply, 2-3 Plies Standard, Additional Plies Available As Needed
- Bellows Total Wall Thickness: 0.012" or 0.016" (.004—.036" Available on Request)
- Ends—Resistance Weld Band, Weld Cap, or Custom Configuration in Any Material: Aluminized Carbon Steel, Stainless Steel or Inconel

Nominal Inside Diameter ID	Overall Length OAL
1-1/2"	4"
	6"
	8"
	10"
1-3/4"	4"
	6"
	8"
	9"
	10"
	10-5/16"
2"	4"
	6"
	8"
	10"
	10-5/16"

Nominal Inside Diameter ID	Overall Length OAL
2-1/4"	4"
	6"
	8"
	10"
2-1/2"	6"
	8"
	10"
3"	6"
	8"
	10"
4"	6"
	8"
	10"


Other Sizes Available Upon Request

EXHAUST DIESEL ENGINE

STANDARD BRAIDED



STANDARD EXHAUST UNBRAIDED BELLOWS



- **Materials:** 300 SS Bellows (Inc 625 Available), Aluminized Carbon Steel End, Cap
Stainless Steel Available
- **Bellows Construction:** Multi-Ply, 2-3 Plies Standard, Additional Plies Available As Needed
- **Bellows Total Wall Thickness:** 0.012" or 0.016" *.004—.036" Available on Request*

Nominal Inside Diameter ID	Overall Length OAL
1-1/2"	4"
	6"
	8"
	10"
1-3/4"	4"
	6"
	8"
	9"
	10"
2"	11"
	4"
	6"
	8"
	10"
2-1/4"	11"
	4"
	6"
	8"
	10"

Nominal Inside Diameter ID	Overall Length OAL
2-1/2"	6"
	8"
	10"
3"	6"
	8"
	10"
4"	6"
	8"
	10"
4-1/2"	6"
	8"
	10"
5"	6"
	8"
	10"
5-1/2"	6"
	8"
	10"

Nominal Inside Diameter ID	Overall Length OAL
6"	6"
	8"
	10"
8"	6"
	8"
	10"
10"	6"
	8"
	10"

Other Sizes Available



E X H A U S T D I E S E L E N G I N E

S T A N D A R D U N B R A I D E D

