


TEFLON® BRAIDED HOSE ASSEMBLIES

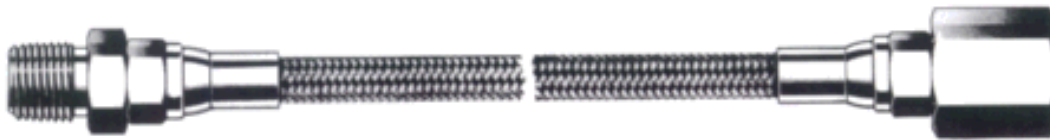

ADVANTAGES

Teflon® Braided Hose Assemblies are intended to work with difficult fluids that other hoses can not. **Duraflex, Inc.** assemblies are ideal for acids, hydraulic fluids, steam, solvents, fuels, chemicals and are corrosion resistant. The inner Teflon® nucleus is durable, has an extended life cycle, weather resistant and the non-stick exterior is easy to clean.

CONSTRUCTION

Smooth inner core of extruded Teflon® covered with stainless steel wire braid reinforcement with 1/4" brass female pipe thread standard end fittings. Other fittings are available in brass and stainless steel upon request.

MAXIMUM WORKING PRESSURE

- 1/4" ID—3000 PSI at 70°F
- 1/4" ID—6000 PSI at 70°F *optional*

MAXIMUM BURST PRESSURE

- 15000 PSI at 70°F

MINIMUM BEND RADIUS

- 3"

TEMPERATURE RANGE

- Continuous Service
-65° to +450°F
- Continuous Service
-100° to +500°F

DELIVERY

Standard Assemblies within 24 hours after receipt of order!



Teflon® is a registered trademark of DuPont.

